




BH05000 USER MANUAL

GUIDE DE L'UTILISATEUR BH05000

MANUAL DEL USUARIO BH05000

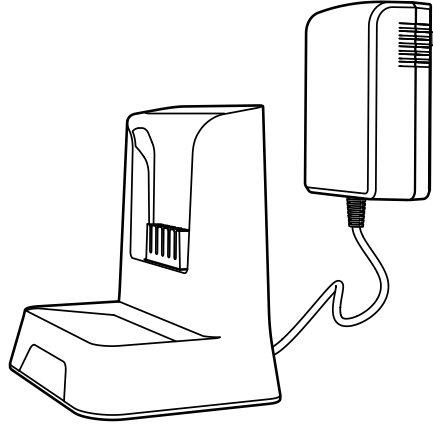

LITHIUM ION BATTERY CHARGER

PILE AU LITHIUM-ION

CARGADOR DE BATERÍA DE IONES DE LITIO

© 2022 TECHTRONIC FLOOR CARE TECHNOLOGY LIMITED. ALL RIGHTS RESERVED.
CHARLOTTE, NC 28262
800-406-2005

IMPORTANT SAFETY INSTRUCTIONS

SAVE THESE INSTRUCTIONS

When using this charger, basic precautions should always be followed, including the following:
READ ALL INSTRUCTIONS BEFORE USING THIS CHARGER

WARNING:

To reduce the risk of fire, electric shock, damage or injury:

- Dry location use only.
- For use only with ONEPWR™ Batteries. Charge only battery packs listed in Compatible Battery Pack Section of this User's Manual. Charging any other battery packs may create a risk of injury or fire.
- Do not use with damaged cord or plug. If charger is not working as it should, has been dropped, damaged, left outdoors, or dropped into water, call Customer Service at 1-888-406-2005.
- Do not pull or carry by cord, use cord as a handle, or pull cord around sharp edges or corners. Keep cord away from heated surfaces.
- Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.
- Do not handle plug or charger with wet hands.
- Follow all charging instructions and do not charge the battery pack outside of the temperature range specified in the charging instructions. Charging improperly or at temperatures outside of the specified range may damage the battery and increase the risk of fire.
- Do not disassemble charger. Do not modify or attempt to repair the charger. This charger has no serviceable parts. Call Customer Service at 1-888-406-2005.

▲WARNING!▲ RISK OF FIRE, PROPERTY DAMAGE, AND INJURY. NEVER EXPOSE YOUR BATTERY PACK OR CHARGER TO WATER, MOISTURE, OR FLUIDS, INCLUDING BUT NOT LIMITED TO CORROSIVE OR CONDUCTIVE FLUIDS, OR ALLOW FLUIDS TO FLOW INSIDE THESE ITEMS. Corrosive or conductive fluids, such as salt water, chlorine, certain industrial chemicals, and bleach or bleach containing products, etc., can cause a short circuit in the battery pack. If your battery pack is exposed to a corrosive or conductive fluid, do not attempt to use or charge the battery pack and immediately perform the following steps:

- Wear appropriate personal protective equipment, including eye protection and rubber gloves.
- Place your exposed battery pack in a large bucket, such as a 5 gallon or similar bucket, and fill the bucket with regular tap water. Do not place more than two packs in the bucket.
- Locate the bucket outdoors in an area inaccessible to children and pets and away from all buildings, garages/sheds, structures, vehicles, and combustible/flammable materials.
- Leave the battery pack(s) in the bucket filled with tap water and call Customer Service at 1-800-406-2005 for additional instructions on the proper disposal of the exposed battery pack(s).

OPERATION

APPLICATIONS

You may use this product for the following purpose:

- Charging ONEPWR™ Lithium Ion Batteries.

CHARGING (Figure 1)

- Charge the battery fully before first use. This will take up to 4 hours. In accordance with federal regulations, the battery does not come fully charged.
- Make sure the power supply is normal household voltage, 120 volts, AC only, 60 Hz.
- Do not place the charger in an area of extreme heat or cold. It will work best at normal room temperature.
- Plug the charger into a power outlet.
- Attach the battery pack to the charger by aligning the ribs on the battery pack to the grooves in the charger. Slide the battery pack into the charger.
- The battery pack will become slightly warm to the touch while charging. This is normal and does not indicate a problem.
- When charging, the lights on the battery will illuminate to show the state of charge. The light on the charger will flash.
- If the light on the charger flashes red, there is an error with the battery or the charger. Try again or call customer service for support.
- When the charge is complete the lights on the battery and charger will turn off.
- To remove the battery pack from the charger, press the latches and pull up on the battery pack.
- During charging, the pack and ambient temperature should be between 41 to 86°F (5 and 30°C).
- The charger will sense if the pack, or ambient temperature, is too cold or too hot, and will return an error code (red light will remain on) and not charge the pack until ambient temperature is reached.




Figure 1
figure 1
Figura 1

MAINTENANCE

- Do not disassemble charger. Do not modify or attempt to repair the charger. This charger has no serviceable parts. Call Customer Service at 1-888-406-2005.

MODE	BATTERY PACK	RED LED ON CHARGER	WHITE LED ON CHARGER	ACTION NEEDED
POWER	Without Battery Pack	On for 3 seconds	On for 3 seconds	Ready to charge battery pack
TESTING	HOT Battery Pack	ON	OFF	When battery pack reaches normal temperature, charger begins charge mode
	COLD Battery Pack	ON	OFF	When battery pack reaches normal temperature, charger begins charge mode
DEFECTIVE	Defective	Flashing	OFF	Battery pack or charger is defective
<ul style="list-style-type: none"> • If defective, try to repeat the conditions a second time by removing and reinstalling the battery pack. If LED status repeats a second time, try charging a different battery. • If a different battery charges normally, dispose of the defective pack • If a different battery also indicates "Defective", the charger may be defective. 				
CHARGING	Charging – LED lights will flash depending on charge level	OFF	Flashing	Battery is being charged
FULLY CHARGED	Charged – lights will go off	OFF	On for 15 seconds	Charging is complete; charger maintains charge mode

COMPATIBLE BATTERY PACKS

ONEPWR™ Battery Packs	
Battery:	Model #
2.0 Ah	BH15020
3.0 Ah	BH15030
3.0 Ah MAX	BH25030
4.0 Ah	BH15240
4.0 Ah MAX	BH25040
6.0 Ah	BH15260
8.0 Ah MAX	BH25280

SERVICE INFORMATION & LIMITED WARRANTY FOR ONEPWR BATTERIES

THREE YEAR LIMITED WARRANTY (DOMESTIC USE)

If this product is not as warranted, contact TTI Floor Care North America Customer Service at 1-800-406-2005. Please have available the proof of purchase and model number for the warranted product.

WHAT THIS LIMITED WARRANTY COVERS: This limited warranty provided by Royal Appliance Mfg. Co., doing business as TTI Floor Care North America (referred to hereafter as "Warrantor") applies only to products purchased in the U.S. (including its territories and possessions), a U.S. Military Exchange, or Canada. When used and maintained in normal household use and in accordance with the User Manual, your ONEPWR charger is warranted against original defects in material and workmanship for three years from the date of original purchase (the "Warranty Period"). If Warrantor determines that the issue you are experiencing is covered under the terms of this warranty (a "covered warranty claim"), we will, at our sole discretion and free of charge (subject to the cost of shipping), either (i) repair your product, (ii) ship you a replacement product, subject to availability; (iii) in the event that the applicable parts or replacement are not reasonably available, ship you a similar product of equal or greater value; or (iv) issue you a store credit (if applicable) or a refund of the actual purchase price at the time of the original purchase, as reflected on the original sales receipt. Parts and replacements may be new, refurbished, lightly used, or remanufactured, in Warrantor's sole discretion.

WHO THIS LIMITED WARRANTY COVERS: This limited warranty extends only to the original retail purchaser, with original proof of purchase from Warrantor or an authorized dealer of Warrantor products, in the U.S., U.S. Military Exchanges, and Canada.

WHAT THIS LIMITED WARRANTY DOES NOT COVER: This warranty does not cover use of the product in a commercial operation (such as maid, janitorial, and equipment rental services, or any other income-generating activity); improper maintenance of the product; the product if it has been subject to misuse, negligence, neglect, vandalism, or the use of voltages other than that on the data plate of this product. This warranty does not cover damage resulting from an act of God, accident, owner's acts or omissions, service of this product by other than Warrantor or a Warrantor authorized service provider (if applicable), or other acts beyond the control of Warrantor. This warranty also does not cover use outside the country in which the product was initially purchased, or resale of the product by the original owner. Pick-up, delivery, transportation, and house calls are not covered by this warranty. In addition, this warranty does not cover any product that has been altered or modified; repairs made necessary by normal wear; or the use of products, parts, or accessories which are either incompatible with this ONEPWR charger or adversely affect its operation, performance, or durability. Normal wear items (if applicable) are not covered under this warranty.

OTHER IMPORTANT TERMS: This warranty is not transferable and may not be assigned; any assignment made in contravention of this prohibition is void. This warranty shall be governed and construed under the laws of the state of North Carolina. The Warranty Period will not be extended by any replacement of batteries or parts or repair performed under this warranty.

THIS WARRANTY IS THE EXCLUSIVE WARRANTY AND REMEDY, AND ALL EXPRESS AND IMPLIED WARRANTIES OTHER THAN THE LIMITED WARRANTY SET FORTH ABOVE, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY DISCLAIMED. IN NO EVENT WILL WARRANTOR BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND OR NATURE TO OWNER OR ANY PARTY CLAIMING THROUGH OWNER, WHETHER BASED IN CONTRACT, NEGLIGENCE, TORT, OR STRICT PRODUCTS LIABILITY OR ARISING FROM ANY CAUSE WHATSOEVER. TO THE EXTENT PERMITTED BY APPLICABLE LAW, NO WARRANTIES THAT ARISE BY OPERATION OF LAW, IF APPLICABLE, SHALL EXCEED THE DURATION OF THE LIMITED WARRANTY PROVIDED HEREIN. Warrantor's liability for damages to you for any costs whatsoever arising out of this statement of limited warranty shall be limited to the amount paid for this product at the time of original purchase and Warrantor shall not be liable for any direct, indirect, consequential, or incidental damages arising out of the use of or inability to use this product.

Some states do not allow the exclusion or limitation of incidental or consequential damages, disclaimers of implied warranties, or limitations on the duration of implied warranties, so the above exclusions, disclaimers, and/or limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

CONSIGNES DE SÉCURITÉ IMPORTANTES

CONSERVEZ CES INSTRUCTIONS

Lorsque vous utilisez ce chargeur, veuillez toujours respecter entre autres les consignes de sécurité élémentaires suivantes :
VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT D'UTILISER CE CHARGEUR.

AVERTISSEMENT :

Pour réduire le risque d'incendie, de décharge électrique, de dommage ou de blessure :

- Pour une utilisation dans un endroit sec uniquement.
- Utilisez uniquement avec les piles ONEPWR^{MC}. Chargez uniquement les blocs-piles indiqués dans la section « Blocs-piles compatibles » du présent guide d'utilisation. La charge de tout autre bloc-piles peut présenter un risque de blessure ou d'incendie.
- N'utilisez pas l'appareil lorsque le cordon ou la fiche est endommagé. Si le chargeur ne fonctionne pas comme il le devrait, est tombé, est endommagé, a été laissé à l'extérieur ou a pris l'eau, communiquez avec le service à la clientèle au 1 888 406-2005.
- Ne tirez pas et ne transportez pas le chargeur par son cordon, n'utilisez pas le cordon comme une poignée et ne le tirez pas contre des arêtes ou des bords tranchants. Tenez le cordon éloigné des surfaces chaudes.
- Ne débranchez pas le chargeur en tirant le cordon. Débranchez le chargeur en tenant la fiche et non le cordon.
- Ne manipulez pas la fiche ou le chargeur avec des mains mouillées.
- Suivez toutes les instructions portant sur la charge. Ne chargez pas le bloc-piles à des températures autres que celles indiquées dans les instructions de charge. Toute charge inappropriée ou à des températures hors de la plage indiquée présente des risques d'endommager la pile en plus d'augmenter les risques d'incendie.
- Ne démontez pas le chargeur. Ne modifiez pas le chargeur et ne tentez pas de le réparer. Ce chargeur ne contient pas de pièces réparables. Communiquez avec le service à la clientèle au 1 888 406-2005.

▲AVERTISSEMENT!▲ RISQUE D'INCENDIE, DE DOMMAGES MATÉRIELS ET DE BLESSURES. NE JAMAIS EXPOSER VOTRE BLOC-PILES OU VOTRE CHARGEUR À DE L'EAU, DE L'HUMIDITÉ OU DES LIQUIDES, Y COMPRIS, SANS S'Y LIMITER, DES LIQUIDES CORROSIFS OU CONDUCTEURS, NI LAISSER LES LIQUIDES S'INFILTRER DANS CES ARTICLES. Les liquides corrosifs ou conducteurs, comme l'eau salée, le chlore, certains produits chimiques industriels, les agents de blanchiment, les produits contenant des agents de blanchiment, etc., peuvent causer un court-circuit dans le bloc-piles. Si le bloc-piles est exposé à un liquide corrosif ou conducteur, ne pas tenter de l'utiliser ou de le charger. Effectuer immédiatement les étapes ci-dessous :

- Porter le matériel de protection individuelle approprié, dont des lunettes de protection et des gants en caoutchouc.
- Placer le bloc-piles exposé dans un grand seau, comme un seau de 5 gallons ou d'une capacité similaire, et le remplir d'eau du robinet. Éviter de placer plus de deux blocs dans le seau.
- Placer le seau à l'extérieur dans un endroit hors de la portée des enfants et des animaux, loin des bâtiments, des garages, des remises, des structures, des véhicules et des matériaux combustibles ou inflammables.
- Laisser le ou les blocs-piles dans le seau rempli d'eau du robinet et communiquer avec le service à la clientèle au 1 888 768-2014 pour obtenir des directives supplémentaires sur l'élimination adéquate du ou des blocs-piles exposé(s).

UTILISATION

UTILISATIONS

Ce produit peut être utilisé aux fins suivantes :

- Charger les piles au lithium-ion ONEPWR^{MC}.

CHARGEMENT (figure 1)

- Effectuez une charge complète de la pile avant la première utilisation. La durée de charge est d'environ 4 heures. Conformément aux règlements fédéraux, la pile n'est pas complètement chargée au moment de l'achat.
- Assurez-vous que l'alimentation électrique a une tension résidentielle normale de 120 v en c.a. seulement et de 60 Hz.
- Ne placez pas le chargeur dans une zone de chaleur ou de froid extrêmes. Il fonctionnera mieux à la température ambiante.
- Branchez le chargeur dans une prise électrique.
- Fixez le bloc-piles au chargeur en alignant les rainures en saillie sur le bloc-piles avec les rainures du chargeur. Faites glisser le bloc-piles dans le chargeur.
- Le bloc-piles deviendra légèrement chaud au toucher pendant la charge. Cette chaleur est normale et n'indique pas de problème.




Figure 1
figure 1
Figura 1

